



ASAB



Price increase
+3%
From 1st March 2021



mago
HIGH PERFORMANCE DRIP TAPE

SKY
QUALITY DRIP TAPE

sabtape
PREMIUM DRIP TAPE

details make the difference

01.2019

SG SYSTEM GROUP




✓ **Gocciolatore anti reflusso**
 Anti-reflux slit emitter / Orifice anti-reflux
 Gotero protegido / Эмиттер с предотвращением противотока

✓ **Labirinto ad ampia sezione**
 Large section labyrinth / Labyrinthe à section large
 Laberinto de sección amplia / Лабиринт широкого сечения

✓ **Flusso turbolento**
 Turbulent flow / Flux turbulent
 Flujo turbolento / Турбулентный поток

✓ **Filtro d'ingresso**
 Inlet filter / Filtre d'entrée
 Filtro de entrada / Входной фильтр

✓ **Filtrazione richiesta**
 Filtration required / Filtrage recommandé
 Filtración requerida / Требуемый уровень фильтрации
 100 micron - 150 mesh

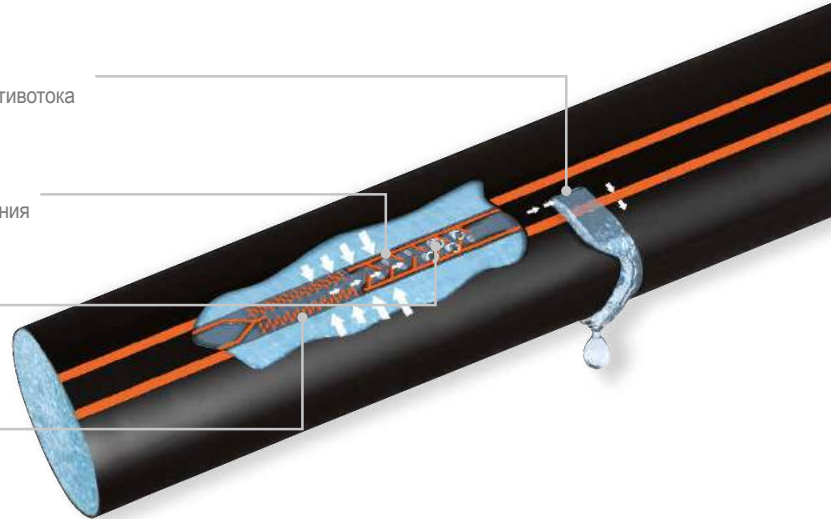

Ø 16 mm



Ø 22 mm

90% 85%

I/h cm I/h-m

0,6

20 3,0
30 2,0
40 1,5

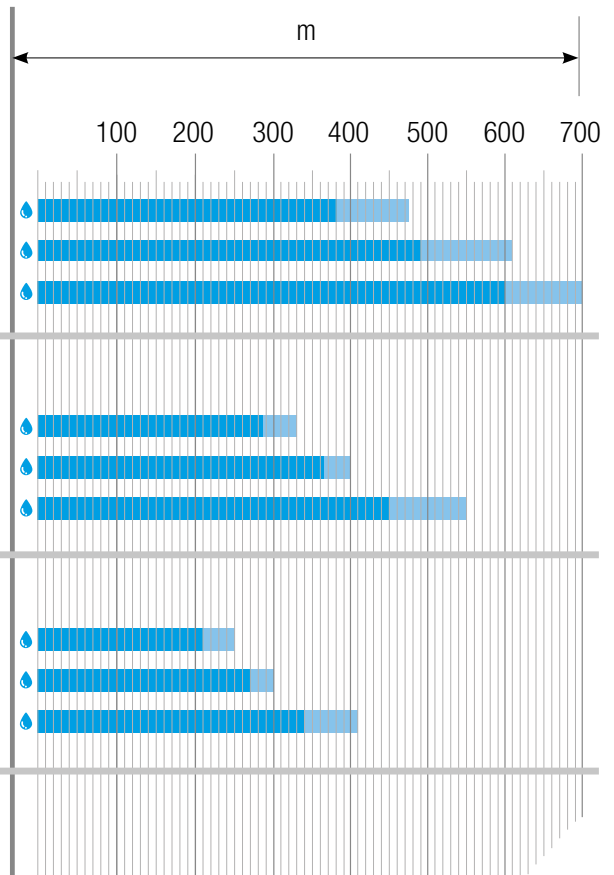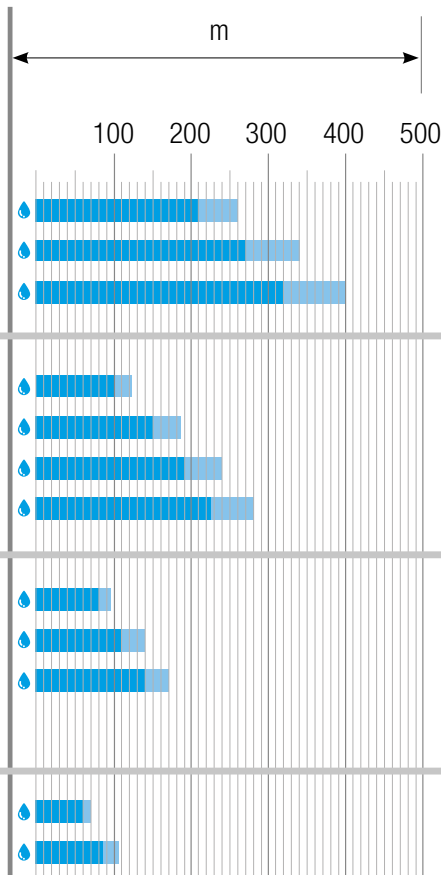




✓ **Gocciolatore anti reflusso**
 Anti-reflux slit emitter / Orifce anti-reflux
 Gotoero protegido / Эмиттер с предотвращением противотока

✓ **Labirinto ad ampia sezione**
 Large section labyrinth / Labyrinthe à section large
 Laberinto de sección amplia / Лабиринт широкого сечения

✓ **Flusso turbolento**
 Turbulent flow / Flux turbulent
 Flujo turbolento / Турбулентный поток

✓ **Filtro d'ingresso**
 Inlet filter / Filtre d'entrée
 Filtro de entrada / Входной фильтр

✓ **Filtrazione richiesta**
 Filtration required / Filtrage recommandé
 Filtración requerida / Требуемый уровень фильтрации
 100 micron - 150 mesh

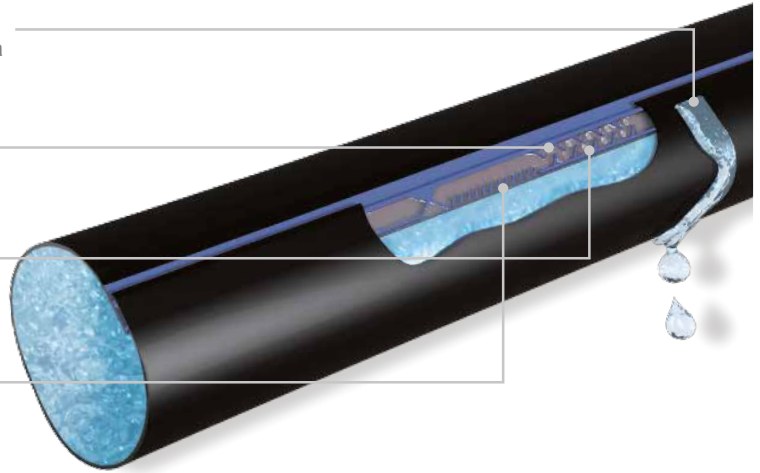

Ø 16 mm

Ø 22 mm

90% 85%



l/h **cm** | **l/h-m**

| | | |
|------------|----|-----|
| 0,6 | 20 | 3,0 |
| | 30 | 2,0 |
| | 40 | 1,5 |

| | | |
|------------|----|------|
| 1,0 | 10 | 10,0 |
| | 20 | 5,0 |
| | 30 | 3,3 |
| | 40 | 2,5 |

| | | |
|------------|----|------|
| 1,5 | 10 | 15,0 |
| | 20 | 7,5 |
| | 30 | 5,0 |
| | 40 | 3,8 |


| | | |
|------------|----|------|
| 2,0 | 10 | 20,0 |
| | 20 | 10,0 |

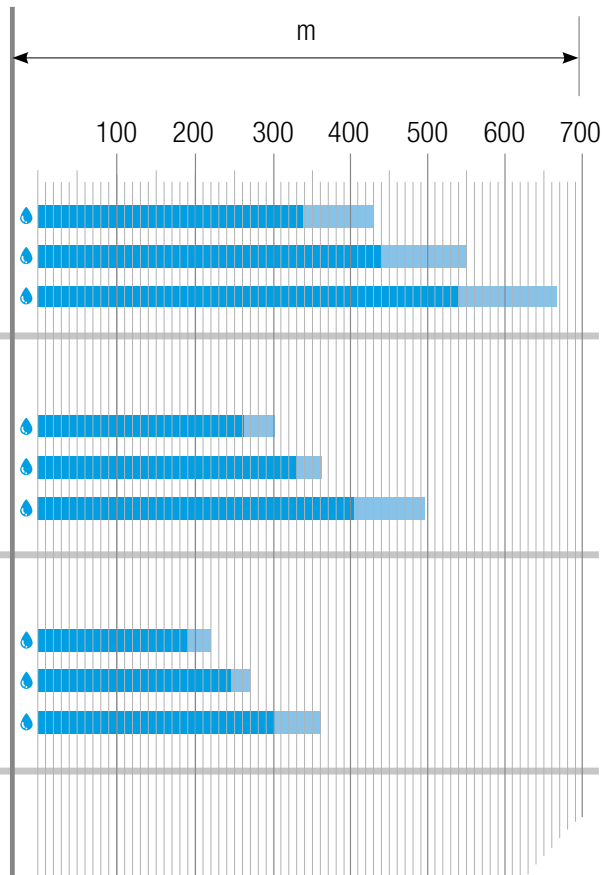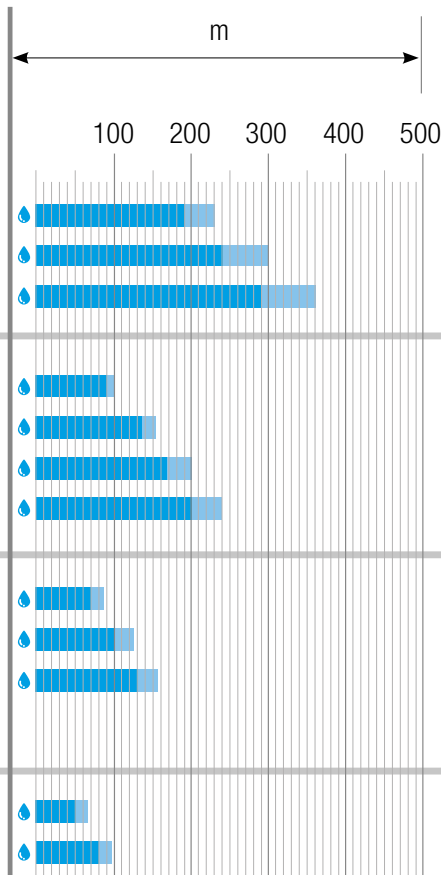

MAIN COIL




| Ø | mil | mm | bar | bar max | m | Kg |
|----|-----|-------|-----|---------|------|------|
| 16 | 5 | 0,125 | 0,7 | 0,9 | 3500 | 30,5 |
| 16 | 6 | 0,150 | 0,7 | 0,9 | 3000 | 30,0 |
| 16 | 7 | 0,175 | 0,7 | 1,0 | 2500 | 26,5 |
| 16 | 8 | 0,200 | 0,7 | 1,0 | 2200 | 27,0 |
| 16 | 10 | 0,250 | 0,7 | 1,2 | 1800 | 25,0 |
| 16 | 12 | 0,300 | 0,7 | 1,5 | 1500 | 24,0 |
| 22 | 6 | 0,150 | 0,7 | 0,9 | 2200 | 28,0 |
| 22 | 7 | 0,175 | 0,7 | 1,0 | 2000 | 27,0 |
| 22 | 8 | 0,200 | 0,7 | 1,0 | 1700 | 27,0 |




| coils x pallet |
|----------------|
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |
| 28 |

20' container



| pallet | coils |
|--------|-------|
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |
| 10 | 280 |

40' container




| pallet | coils |
|--------|-------|
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |
| 24 | 672 |

truck



| pallet | coils |
|--------|-------|
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |
| 26 | 728 |

loose coils




| 20' | 40' |
|-----|-----|
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |
| 420 | 840 |

HALF COIL




| Ø | mil | mm | bar | bar max | m | Kg |
|----|-----|-------|-----|---------|------|------|
| 16 | 5 | 0,125 | 0,7 | 0,9 | 1750 | 15,4 |
| 16 | 6 | 0,150 | 0,7 | 0,9 | 1500 | 15,2 |
| 16 | 7 | 0,175 | 0,7 | 1,0 | 1250 | 13,4 |
| 16 | 8 | 0,200 | 0,7 | 1,0 | 1100 | 13,7 |
| 16 | 10 | 0,250 | 0,7 | 1,2 | 900 | 13,0 |




| coils x pallet |
|----------------|
| 56 |
| 56 |
| 56 |
| 56 |
| 56 |
| 56 |

20' container



| pallet | coils |
|--------|-------|
| 10 | 560 |
| 10 | 560 |
| 10 | 560 |
| 10 | 560 |
| 10 | 560 |
| 10 | 560 |

40' container




| pallet | coils |
|--------|-------|
| 24 | 1344 |
| 24 | 1344 |
| 24 | 1344 |
| 24 | 1344 |
| 24 | 1344 |
| 24 | 1344 |

truck



| pallet | coils |
|--------|-------|
| 26 | 1456 |
| 26 | 1456 |
| 26 | 1456 |
| 26 | 1456 |
| 26 | 1456 |
| 26 | 1456 |

loose coils




| 20' | 40' |
|-----|------|
| 830 | 1680 |
| 830 | 1680 |
| 830 | 1680 |
| 830 | 1680 |
| 830 | 1680 |
| 830 | 1680 |

1000m COIL




| Ø | mil | mm | bar | bar max | m | Kg |
|----|-----|-------|-----|---------|------|------|
| 16 | 5 | 0,125 | 0,7 | 0,9 | 1000 | 9,0 |
| 16 | 6 | 0,150 | 0,7 | 0,9 | 1000 | 10,2 |
| 16 | 7 | 0,175 | 0,7 | 1,0 | 1000 | 10,7 |
| 16 | 8 | 0,200 | 0,7 | 1,0 | 1000 | 12,4 |




| coils x pallet |
|----------------|
| 80 |
| 72 |
| 60 |
| 60 |

20' container




| pallet | coils |
|--------|-------|
| 10 | 800 |
| 10 | 720 |
| 10 | 600 |
| 10 | 600 |

40' container




| pallet | coils |
|--------|-------|
| 24 | 1920 |
| 24 | 1728 |
| 24 | 1440 |
| 24 | 1440 |

truck




| pallet | coils |
|--------|-------|
| 26 | 2080 |
| 26 | 1872 |
| 26 | 1560 |
| 26 | 1560 |

loose coils




| 20' | 40' |
|------|------|
| 1200 | 2400 |
| 1100 | 2200 |
| 880 | 1760 |
| 880 | 1760 |

200m COIL




| Ø | mil | mm | bar | bar max | m | Kg |
|----|-----|-------|-----|---------|-----|-----|
| 16 | 6 | 0,150 | 0,7 | 0,9 | 200 | 2,2 |
| 16 | 7 | 0,175 | 0,7 | 1,0 | 200 | 2,5 |
| 16 | 8 | 0,200 | 0,7 | 1,0 | 200 | 2,6 |




| coils x pallet |
|----------------|
| 176 |
| 176 |
| 176 |

20' container



| pallet | coils |
|--------|-------|
| 10 | 1760 |
| 10 | 1760 |
| 10 | 1760 |

40' container



| pallet | coils |
|--------|-------|
| 24 | 4224 |
| 24 | 4224 |
| 24 | 4224 |

truck




| pallet | coils |
|--------|-------|
| 26 | 4576 |
| 26 | 4576 |
| 26 | 4576 |

100m COIL




| Ø | mil | mm | bar | bar max | m | Kg |
|----|-----|-------|-----|---------|-----|-----|
| 16 | 6 | 0,150 | 0,7 | 0,9 | 100 | 1,3 |
| 16 | 7 | 0,175 | 0,7 | 1,0 | 100 | 1,3 |
| 16 | 8 | 0,200 | 0,7 | 1,0 | 100 | 1,5 |




| coils x pallet |
|----------------|
| 368 |
| 368 |
| 368 |

20' container




| pallet | coils |
|--------|-------|
| 10 | 3680 |
| 10 | 3680 |
| 10 | 3680 |

40' container



| pallet | coils |
|--------|-------|
| 24 | 8832 |
| 24 | 8832 |
| 24 | 8832 |

truck



| pallet | coils |
|--------|-------|
| 26 | 9568 |
| 26 | 9568 |
| 26 | 9568 |




✓ **Gocciolatore anti reflusso**
 Anti-reflux slit emitter / Orifice anti-reflux
 Gotero protegido / Эмиттер с предотвращением противотока

✓ **Labirinto ad ampia sezione**
 Large section labyrinth / Labyrinthe à section large
 Laberinto de sección amplia / Лабиринт широкого сечения

✓ **Filtro d'ingresso**
 Inlet filter / Filtre d'entrée
 Filtro de entrada / Входной фильтр

✓ **Flusso turbolento**
 Turbulent flow / Flux turbulent
 Flujo turbolento / Турбулентный поток

✓ **Filtrazione richiesta**
 Filtration required / Filtrage recommandé
 Filtración requerida / Требуемый уровень фильтрации
 100 micron - 150 mesh

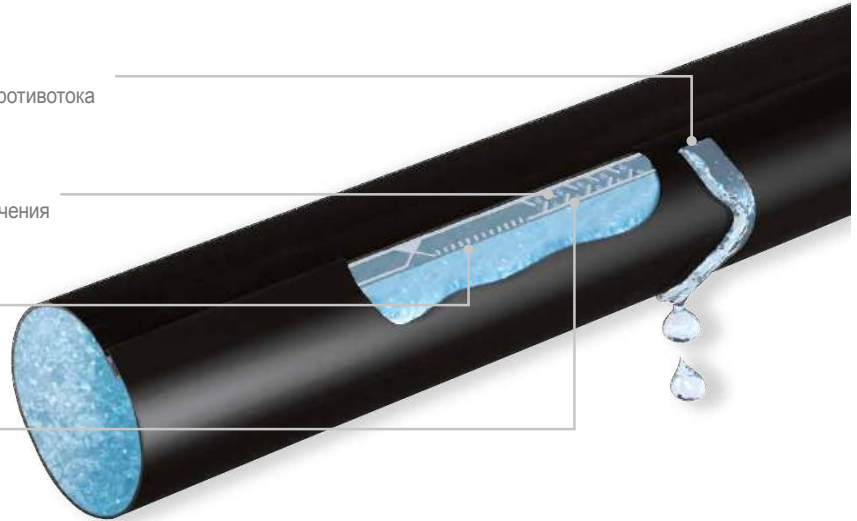

Ø 16 mm



Ø 22 mm

90% 85%

I/h cm I/h-m

0,6

20 3,0
30 2,0
40 1,5

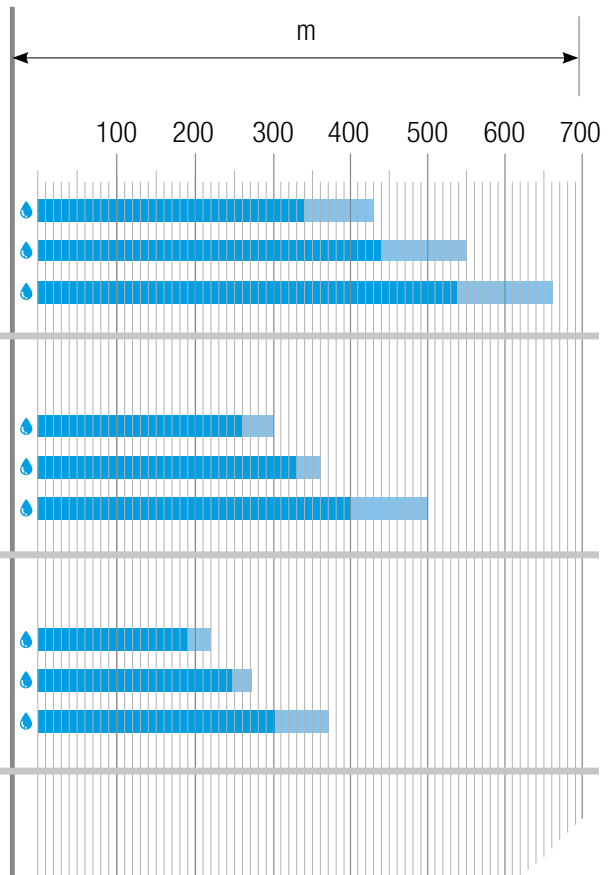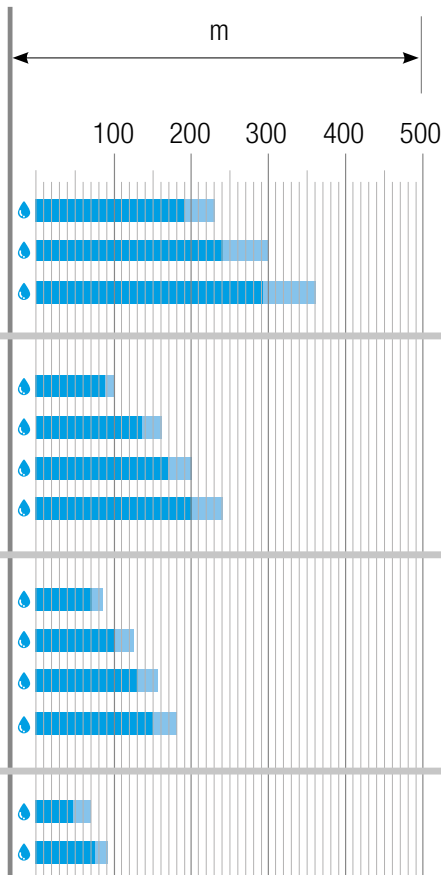

1,0




10 10,0
20 5,0
30 3,3
40 2,5

1,5

10 15,0
20 7,5
30 5,0
40 3,8

2,0

10 20,0
20 10,0

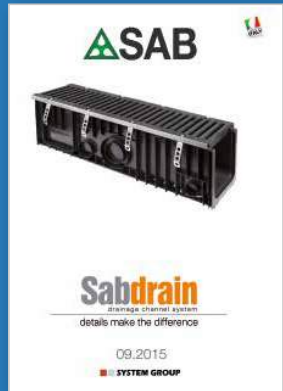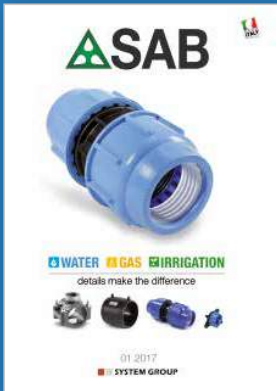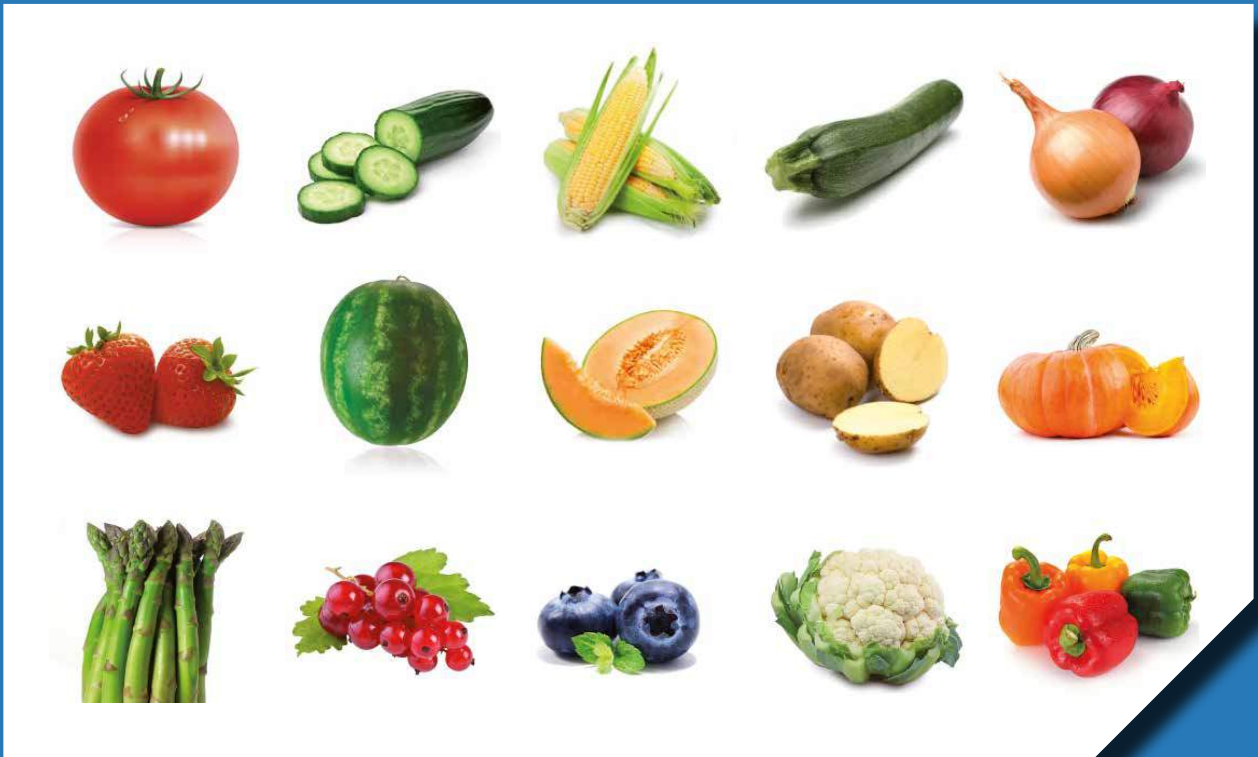

ASAB



SAB S.p.A.
 via Salvo D'Acquisto
 61048 Sant'Angelo in Vado (PU) - Italy
 tel. +39 0722 810 800
 fax +39 0722 810 158
 sab@tubi.net
 www.sabspa.com

SYSTEM GROUP
 www.tubi.net