


SI Metric

3/4"-PRV & 3/4"-PRV-05

Dimensions



Weight: 0.13 Kg

Technical Data

Size: 3/4"; DN20

End Connections: Threaded

Inlet: Female BSP; NPT

Outlet: Female BSP; NPT or Male BSPT; NPT

Flow Range Model 3/4"-PRV: 0.2-5 m³/h

Flow Range Model 3/4"-PRV-05: 0.01-3 m³/h

Pressure Ratings: 9 bar

Operating Pressure Range: 0.7-9 bar


Setting Springs Selection Table

Setting Range bar	Spring Color	Spring Name
0.5-1.2	Yellow	A
0.8-2.5	White	B
2.0-4.0	Red	C
3.5-6.0	Black	D

Flow Chart


Required supply pressure above setting

To calculate the minimum required supply pressure, ΔP add the ΔP in the Flow Chart to PRV desired set point.

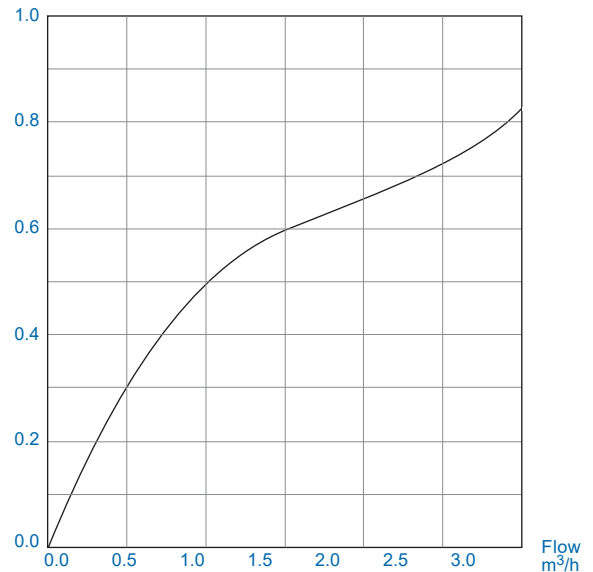

1"-PRV & 1"-PRV-05

Dimensions



Weight: 0.36 Kg

Technical Data

Size: 1"; DN25

End Connections: Female Threads BSP; NPT

Flow Range Model 1"-PRV: 0.45-7 m³/h

Flow Range Model 1"-PRV-05: 0.1-7 m³/h

Pressure Ratings: 9 bar

Operating Pressure Range: 0.7-9 bar

Setting Springs Selection Table

Setting Range bar	Spring Color	Spring Name
0.5-1.2	White	B
1.0-2.0	Red	C
1.5-3.5	Black	D
3.0-5.5	Brown	Q

Flow Chart

Required supply pressure above setting

ΔP To calculate the minimum required supply pressure, bar add the ΔP in the Flow Chart to PRV desired set point.

